




WZIERNIK KWASOODPORNY KOŁNIERZOWY 2055

- max. temperatura pracy 200°C przy ciśnieniu 9,8 bar
- max. temperatura pracy 50°C przy ciśnieniu 15 bar
- zabudowa DIN 3202 1-F1
- kołnierze wg DIN 2501 / PN16

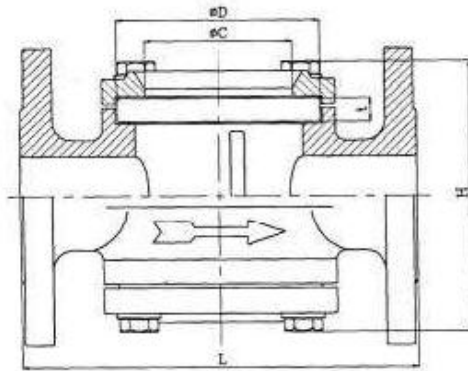

materiały:

korpus: ASTM A351-CF8M (316)
pokrywa: ASTM A351-CF8M (316)
uszczelnienie: PTFE
śruby: AISI 304

	15	20	25	32	40	50	65	80	100
0C	32	44	53	60	75	87	104	135	155
0D	55	60	70	88	103	120	142	162	180
L	130	150	160	180	200	230	290	310	350
H	70	90	90	120	120	140	170	200	220
t	8	8	10	12	12	12	15	18	18